



3M™ Sun Control Window Film Prestige 70 Exterior

- Spectrally selective, multilayer nano-technology
- Optimal visible light transmission and heat rejection performance
- Reduces solar heat gain keeping occupants cool and comfortable
- Reduces heating and cooling costs
- Extends the life and vibrancy in furniture, fittings and fabrics
- Reduces the risk of injury from flying glass


3M™ Sun Control Window Film Prestige 70 Exterior

Description

With **3M's Prestige Series** you can enjoy the benefits of a world-class window film while leaving the window appearance virtually unchanged. Prestige Series nano-technology can significantly reduce heat gain and create a comfortable environment, as well as helping to reduce the workload of air conditioners and save energy costs. Because the films use no metal, they are not susceptible to corrosion, plus Prestige Series Window Films offer reflectivity that is actually lower than glass.

Prestige 70 Exterior is a multi layer and metal free film based on nanotechnology. It has a uniquely high visual light transmission for a film that has exceptionally high heat rejection capabilities. The film also reduces glare and blocks almost the entire amount of UVA and UVB rays which are the main cause of fading and skin damage. The patented multi layer construction and manufacturing process ensures an even longer warranty and life expectancy compared to other exterior film technologies.

Solar Performance and light transmission

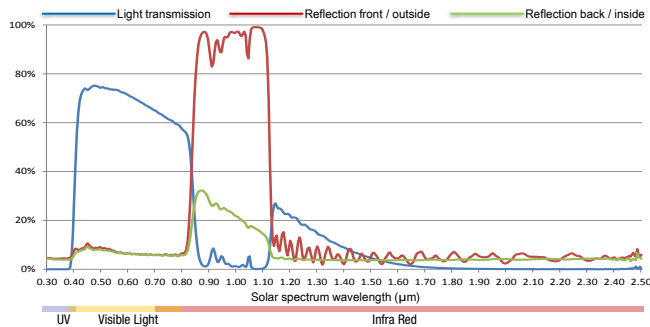

Features (on 6 mm clear glass)

Total Solar Energy Rejected	52%
Near IR reduction	97%
Glare reduction	21%
UV rays blocked	99.9%

Film properties

Thickness without adhesive	0.062mm / 62µm
Colour	Virtually clear
Material	Co-extruded PET/coPMMA
Adhesive	Pressure sensitive acrylic
Top coating	Scratch resistant hard coat

Installation

Prestige Series exterior films are installed using water and a soap solution. They are faster drying than other films, resulting in a faster installation time. Full adhesion is reached after approximately 8 - 10 days at 18°C (in dry conditions). Edge sealing of Prestige Exterior Series is not required on vertical applications, except where moisture can pool/ accumulate for an extended time. Edge sealing on horizontal / sloped applications is recommended. A recommended edge sealant is 3M™ Marine Sealant 3200.

Cleaning

3M Window Films may be cleaned 30 days after installation using ordinary window cleaning agents and avoiding the use of abrasive particles. Do not use rough sponges, cloths or brushes. Synthetic sponges, soft wipes or rubber squeegee cleaners are recommended.

Glass Type	Film Type on 6mm Glass	Visible Light Transmission	Visible Reflection Exterior	Visible Reflection Interior	Heat Gain Reduction	G-value (Solar Heat Gain Coefficient)	Total Solar Energy Rejected
Single Pane							
Clear	No film	89%	8%	9%	N/A	0.82	19%
	PR 70 Ext	70%	7%	7%	41%	0.48	52%
Tinted	No film	53%	6%	6%	N/A	0.63	37%
	PR 70 Ext	42%	6%	5%	38%	0.39	61%
Double Pane							
Clear	No film	79%	15%	15%	N/A	0.70	30%
	PR 70 Ext	63%	12%	14%	44%	0.39	61%
Tinted	No film	47%	8%	13%	N/A	0.51	49%
	PR 70 Ext	38%	7%	13%	39%	0.29	71%

The technical information, recommendations and other statements contained in this document are based upon European and/ or US tests or experience that 3M believes are reliable, but the accuracy or completeness of such information is not guaranteed. Many factors beyond 3M's control and uniquely within the user's knowledge and control can affect the use and performance of a 3M product in a particular application. Given the variety of factors that can affect the use and performance of a 3M product, the user is solely responsible for evaluating the 3M product and determining whether it is fit for a particular purpose and suitable for user's method of application. The information provided in this report is believed to be reliable; however, due to the wide variety of intervening factors, 3M does not warrant that the results will necessarily be obtained. All issues regarding warranty and liability for the product and the effect of its use are governed in accordance with the provisions of the appropriate contract of sale unless local laws dictate otherwise.



Renewable Energy Division
3M United Kingdom plc
 3M Centre
 Cain Road, Bracknell
 Berkshire RG12 8HT
 3M.eu/WindowFilm

Please recycle.
 © 3M 2013. All rights reserved.